


DRILLING MOTORS

Axon Downhole Products offers a complete line of drilling motors in sizes ranging from 4-3/4 inches to 11-1/4 inches OD. Each size is available in a wide range of power section lobe, stage and rubber compound configurations to match the torque and speed characteristics requested by the customer. Key features include:

- 0 - 3° Adjustable Bent Housings
- Sealed, Pressure-Balanced, Oil-Lubricated Bearings
- High-Strength Forged Drive Shafts
- Roller Thrust and Roller Radial Bearings
- CV-Type Universal Joints
- Rotor Catch
- Run Slick Sleeve or Threaded Stabilizers
- Solid or Gun-Drilled Rotors
- Normal or Even-walled Elastomers

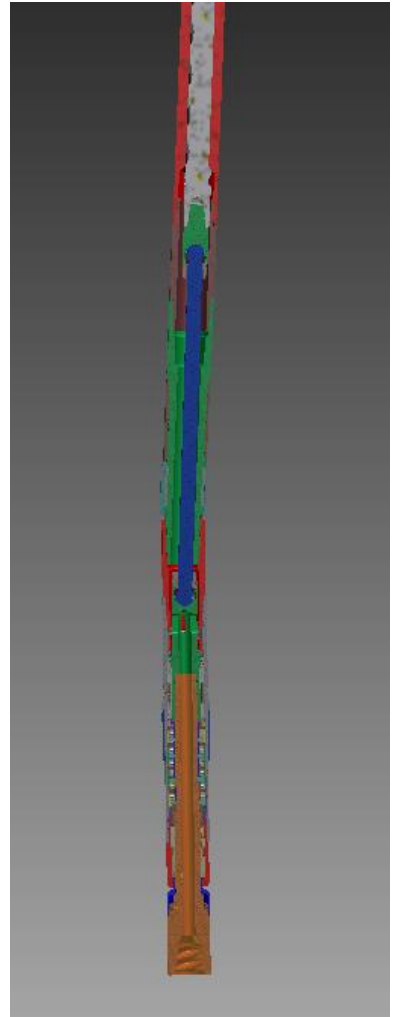

Drill directional, horizontal or straight holes with confidence and reliability.

Table 1. Commonly Requested Configurations

Size	Length (Ft)	Flow Range (GPM)	Speed (RPM)	Stall Torque (Lbs Ft)	Max WOB (Lbs)	Connections
11-1/4"	34.00	900 - 1800	44 - 120	25,000	400K	7-5/8 Reg Box x 7-5/8 Reg Box
9-5/8"	30.33	600 - 1200	52 - 128	13,000	240K	7-5/8 Reg Box x 7-5/8 Reg Box
8"	29.00	300 - 900	35 - 138	8,200	182K	6-5/8 Reg Box x 6-5/8 Reg Box
6-3/4"	27.08	300 - 600	64 - 151	5,900	128K	4-1/2 IF Box x 4-1/2 Reg Box
4-3/4"	22.50	150 - 250	85 - 244	2,900	60K	3-1/2 IF Box x 3-1/2 Reg Box